



THREE TERMINAL NEGATIVE VOLTAGE REGULATORS -15V FH79L15

-15V 三端稳压器 SOT-89

FEATURES

- Best Suited to Power Supply for TTL, C²-MOS
- Built-in Overcurrent Protective Circuit
- Built-in Thermal Protective Circuit
- Max. Output Current 150mA ($T_j=25^\circ\text{C}$)
- SOT-89 Packaged in Power Mini .



1.Gnd 2.Vin 3.Vout


Characteristic		Symbol	Rating	Unit
Input Voltage	(5V~15V)	V _{lin}	- 35	V
	(18V~24V)		- 40	
Power Dissipation ($T_c=25^\circ\text{C}$)		PD	500	mW
Operating Junction Temperature		T _j	- 30 ~ 150	
Operating Temperature		T _{opr}	- 30 ~ 75	
Storage Temperature		T _{stg}	- 55 ~ 75	

DEVICE MARKING 打标


FH79L15 = 9G

EQUIVALENT CIRCUIT

等效电路图

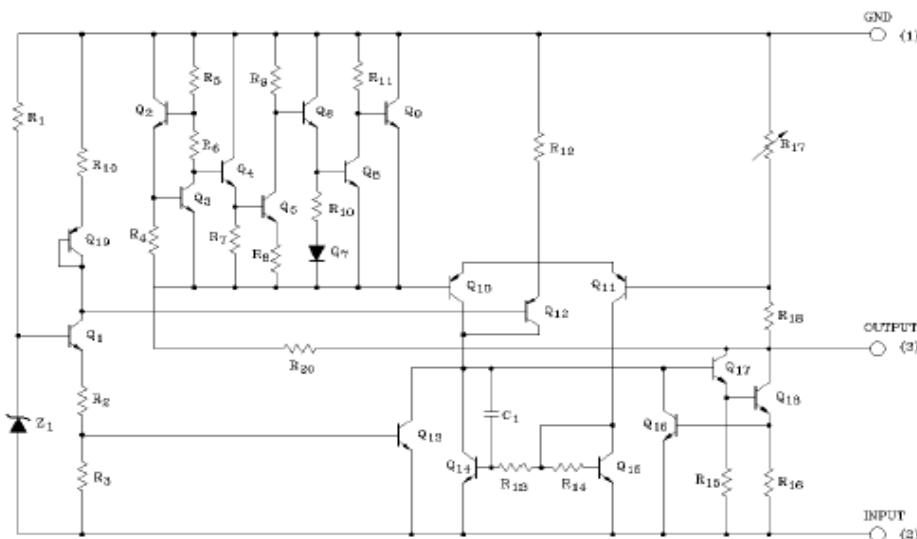

TEST CIRCUITS

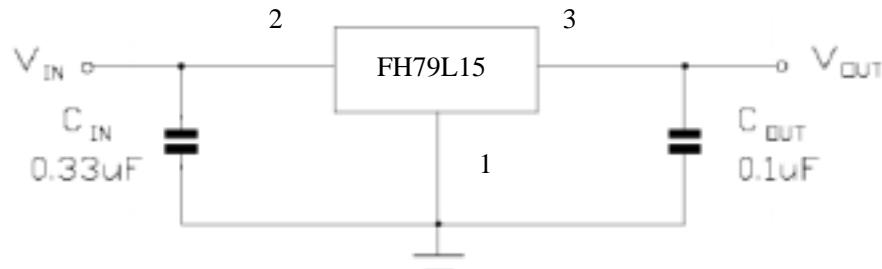

ELECTRICAL CHARACTERISTICS


FH79L15

Unless otherwise specified ,Vin=-23V, Iout=40mA, Cin=0.33uF, Cout=0.1uF , Tj=0 to125

CHARACTERISTIC	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	Vout	Tj=25		-15.6	-15	-14.4	V
Input Regulation	Reg line	Tj=25	-30V≤Vin≤-17.5V,	-	130	300	mV
			-30V≤Vin≤-20V,	-	110	250	
Load Regulation	Reg load	Tj=25	1.0mA≤Iout≤100mA	-	25	150	mV
			1.0mA≤Iout≤40mA	-	12	75	
Output Voltage	Vout	-30V≤Vin≤-17.5V, 1.0mA≤Iout≤40mA		-15.75	-	-14.25	V
		Vin=-23V, 1.0mA≤Iout≤70mA		-15.75	-	-14.25	
Quiescent Current	IQ	Tj=25		-	3.3	6.5	mA
		Tj=125		-	-	6.0	
Quiescent Current Change	IQ	-30V≤Vin≤-20V,		-	-	1.5	mA
		1.0mA≤Iout≤40mA		-	-	0.1	
Output Noise Voltage	V _{NO}	Ta=25 , 10Hz ≤f≤100kHz		-	90	-	uVrms
Long Term Stability	Vout/ t			-	30	-	mV/1.0 kHrs
Ripple Rejection Ratio	RR	F=120Hz,-28.5V≤Vin≤-18.5V, Tj=25		34	40	-	dB
Dropout Voltage	Vin-Vout	Tj=25 , Iout=40mA			1.7		V
Average Temperature Coefficient of Output Voltage	TCvo	Iout=5mA		-	-1.3	-	mV/



SOT-89 封装外形尺寸 (SOT-89 DIMENSION)

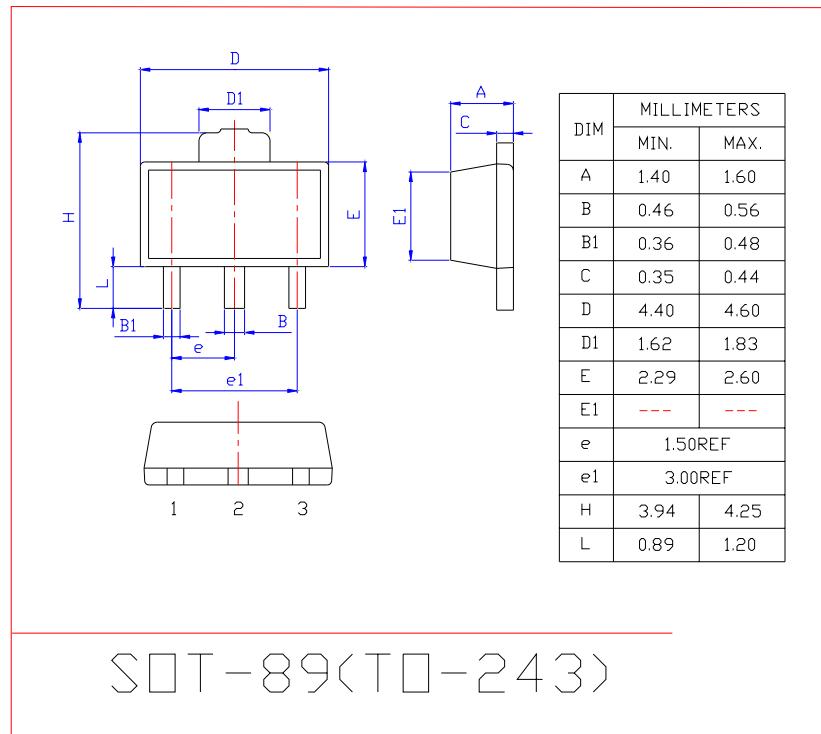

编带包装规格 (SOT-89 TAPE AND REEL SPECIFICATION AND PACKING SPECIFICATION)

